

EJ-Debug for SH-Mobile3



- ❑ Supports Renesas SH-Mobile 3 series
- ❑ Supports H-UDI interface
- ❑ View and modify the internal peripheral registers
- ❑ 3 hardware breakpoints can be set for address and status conditions
- ❑ Unlimited software breakpoints
- ❑ Download to Flash Memory capability
- ❑ Useful for field debugging or maintenance
 - Powered by USB bus(No AC adapter required)
 - Small size(86mm X 101mm X 23mm)
- ❑ Auto-script execution by BATCH button on the hardware unit
 - perfect use in auto-verification of the target on mass production or for updating new versions
- ❑ USB host interfaces for high-speed communication with host computer
- ❑ Sophia's high-level language debugger, Watchpoint®, is included with all Sophia Systems emulators (Windows®98/Me/2000/XP platforms)

Specifications

Target CPU	SH-Mobile 3 (SH73180), SH-Mobile SA
Target Vcc	Vcc= 3.3V
Memory and I/O	Entire space is available to user
Interrupts	Both internal and external interrupts are available to user
Breakpoints and Break Options	<p>Execution address break options:</p> <ul style="list-style-type: none"> • Max 3 hardware breakpoints Execution instruction address and memory access can be specified. • Unlimited software breakpoints <p>Other break options:</p> <ul style="list-style-type: none"> ▪ Forced break from Debug Monitor
Flash Memory	Download to target external Flash memory

Configuration

The EJ-Debug for SH-Mobile 3 provides a high level of software debugging from your PC/AT or notebook computer.

Hardware

An EJ-Debug for SH-Mobile 3 system consists of the SH-Mobile 3 Probe Set with USB host interface.
(EJ-Debug for SH-Mobile 3 can not be used for other CPUs)

Software

Watchpoint®, a high-level language debugger for Windows®98/Me/2000/XP, is included with the EJ-Debug for SH-Mobile.

Media:

CD-ROM

Supported Tool Chains:

Watchpoint supports the following compilers and supported OS:


Compiler:

Renesas	SHC
Green Hills	GHS
GAIO	XCC-V
IAR	EW/S SH
GNU	

Supported OS:

HISH77	HI7700	G-OS
NORTi3	NORTi4	PrKERNEL
Linux		

Target ICE Connections

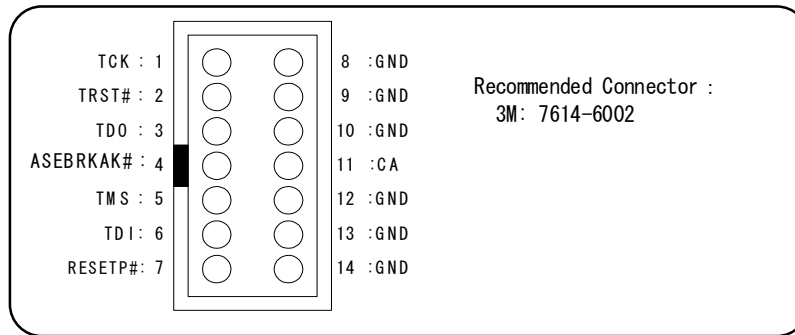

14-pin H-UDI connector pin assignment (Top View)

*Note: The connection for 36-pin AUD connector requires the optional adapter. The optional adapter does not make available trace capabilities.

Ordering Information

Part No.	Description
EJD4002E	Probe Set, EJ-Debug for SH-Mobile 3 with USB host interface and Watchpoint® SH-Mobile 3 debugger for Windows®98/Me/2000/XP

System requirements for Watchpoint® Debugger:

OS: Windows98/Me/2000/XP **Memory:** 32 Mbyte (64 Mbyte recommended)
Hard Disk: 20 Mbyte for installation

Watchpoint is a registered trademark of Sophia Systems Co., Ltd.

Windows is a registered trademark of Microsoft Corporation.

All other brands and product names are trademarks or registered trademarks of their respective companies. All configurations are subject to change without notice.



Sophia Systems Co., Ltd.
URL: <http://www.sophia.com>